

DESCRIPTION

Solenoid valve 2 way normally closed with assisted-lift diaphragm

CONSTRUCTION

Body and cover	Brass
Armature tube	AISI 303
Plunger and core	AISI 430FR
Springs	AISI 302
Seal material	FPM
	NBR (on request)



FEATURES


Maximum allowable pressure PS 16bar^③

Maximum fluid viscosity 25cSt (mm²/s)

Ambient temperature: from -10°C to +80°C according to the coil

Preferred mounting position with vertical coil above

OPTIONS:  US certified coils
NPT connections
ATEX Ex d coils
Degreased for use with oxygen

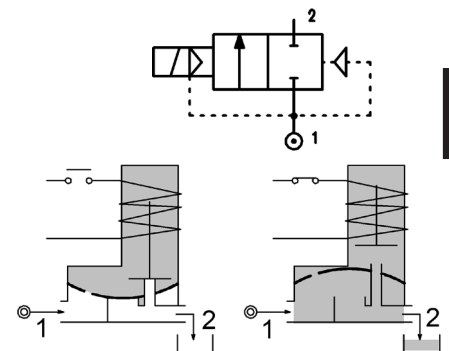

CODE ① ②	Connection G ISO 228	Orifice mm Ø	Kv m³/h	Differential pressure bar			Nominal power	Coil		Seal ①	Temp. range °C
				Min	Max AC DC			Series	Width		
E168CV11///...	3/8"	11	1.2	0	14	5	10W	2	30	FPM=V	-10 +140
					-	14	14W	5	36		
E168DV16///...	1/2"	16	2.4	0	14	2.5	10W	2	30		
					-	14	14W	5	36		
E168EV16///...	3/4"	16	2.4	0	14	2.5	10W	2	30		
					-	14	14W	5	36		
E168EV20/H/...	3/4"	20	7.2	0	16	5	10W	2	30		
					-	16	14W	5	36		
E168FV25///...	1"	25	7.2	0	8	-	10W	2	30		
					14	1.5	14W	5	36		
					-	6	27W	5	36		
E168FV25/H/...	1"	25	8.4	0	16	5	10W	2	30		
					-	16	14W	5	36		
E168GV35///...	1"1/4	35	16.2	0	16	-	10W	2	30		
					-	6	14W	5	36		
					-	16	27W	5	36		
E168HV40///...	1"1/2	40	16.8	0	16	-	10W	2	30		
					-	6	14W	5	36		
					-	16	27W	5	36		

① Seal


② Coil

③ The maximum allowable pressure PS for steam 2,5bar (gauge pressure)

COILS ②	Alternating Current 50/60Hz (V)							Direct Current (V)		Electrical connection	Connectors
	12	24	48	110	220 230	240	380	12	24		
Series 2 Width 30-10W	20A	20B	20C	20D	20E	20F	20G	200	201	DIN 43650A	PG9 code 10349000 or PG11 code 10349001
Series 5 Width 36-14W	-	U55B 	-	U55D 	-	U55F 	-	U550 	U551 		
Series 5 Width 36-27W	52A	52B	52C	52D	52E	52F	52G	520	521		

DESCRIPTION
Insulation class
Series 2 =F Series 5=H
Voltage tolerance
AC +15% -10%
DC ± 10%
Protection class
IP65 with connector fitted
IP00 without connector

OPTIONS
Class H insulation (series 2)
Cable attached
Special coil voltage
Special coil powers
 certified coils

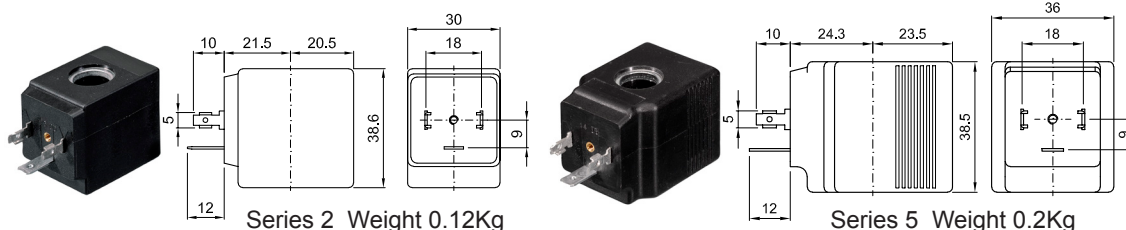


Series 2 Weight 0.12Kg


Series 5 Weight 0.2Kg

SPARE PARTS LIST

1. Coil
2. Armature tube
3. Armature tube OR
4. Diaphragm assembly+plunger

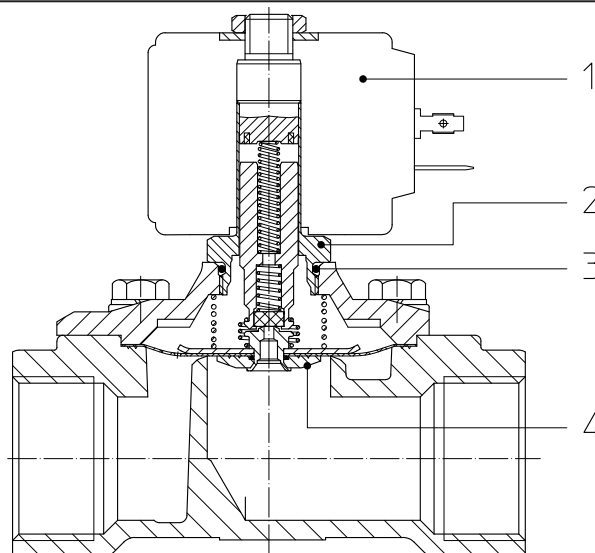

OVERALL DIMENSION

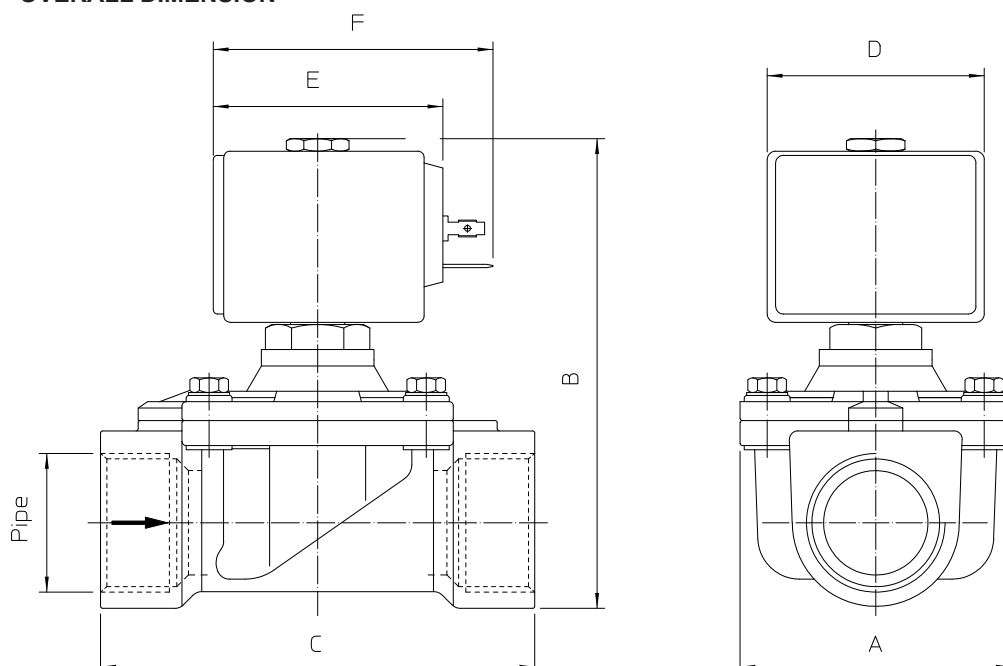

PIPE	A	B	C
G3/8"	50	89	56
G1/2"	50	100	70
G3/4"	50	100	70
G3/4" /H	65	103	104
G1"	65	112	104
G1" /H	65	110	104
G1"1/4	94	130	128
G1"1/2	94	130	128

COIL TYPE	D	E	F
Series 2 30mm	30	42	54
Series 5 36mm	36	48	60

DESCRIPTION

Solenoid valve 2 way normally closed
with assisted-lift diaphragm in stainless steel AISI 316

CONSTRUCTION


Body and cover	AISI 316
Armature tube	AISI 316
Plunger and core	AISI 430FR
Springs	AISI 302
Shading ring	Silver
Seal material	FPM
	NBR (on request)



FEATURES

Maximum allowable pressure PS 16bar^③
Maximum fluid viscosity 25cSt (mm²/s)
Ambient temperature: from -10°C to +80°C according to the coil
Preferred mounting position with vertical coil above

OPTIONS:  us certified coils
NPT connections
ATEX Ex d coils
Degreased for use with oxygen

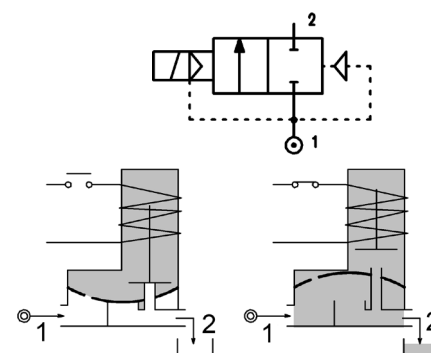

4

CODE ① ②	Connection G ISO 228	Orifice mm Ø	Kv m³/h	Differential pressure bar			Nominal power	Coil		Seal ①	Temp. range °C
				Min	Max			Series	Width		
E178CV15///...	3/8”	15	2.4	0	14	6	10W	2	30	FPM=V	-10 +140
					-	14	14W	5	36		
E178DV16///...	1/2"	16	3	0	14	6	10W	2	30		
					-	14	14W	5	36		
E178EV20///...	3/4"	20	3.6	0	14	6	10W	2	30		
					-	14	14W	5	36		
E178FV25///...	1"	25	8.4	0	14	3	10W	2	30		
					-	8	14W	5	36		
					-	14	27W	5	36		
E178GV35///...	1"1/4	35	18	0	8	-	10W	2	30		
					14	2	14W	5	36		
					-	7	27W	5	36		
E178HV40///...	1"1/2	40	19.2	0	8	-	10W	2	30		
					14	2	14W	5	36		
					-	7	27W	5	36		

① Seal

② Coil

③ The maximum allowable pressure PS for steam is 2,5bar (gauge pressure)

COILS ②	Alternating Current 50/60Hz (V)							Direct Current (V)		Electrical connection	Connectors
	12	24	48	110	220 230	240	380	12	24		
Series 2 Width 30-10W	20A	20B	20C	20D	20E	20F	20G	200	201	DIN 43650A	PG9 code 10349000 or PG11 code 10349001
Series 5 Width 36-14W	-	U55B 	-	U55D 	-	U55F 	-	U550 	U551 		
Series 5 Width 36-27W	52A	52B	52C	52D	52E	52F	52G	520	521		


DESCRIPTION

Insulation class
Series 2 =F Series 5=H
Voltage tolerance
AC +15% -10%
DC ± 10%
Protection class
IP65 with connector fitted
IP00 without connector

OPTIONS

Class H insulation (series 2)
Cable attached
Special coil voltage
Special coil powers
 certified coils

(for coil details see section 8)

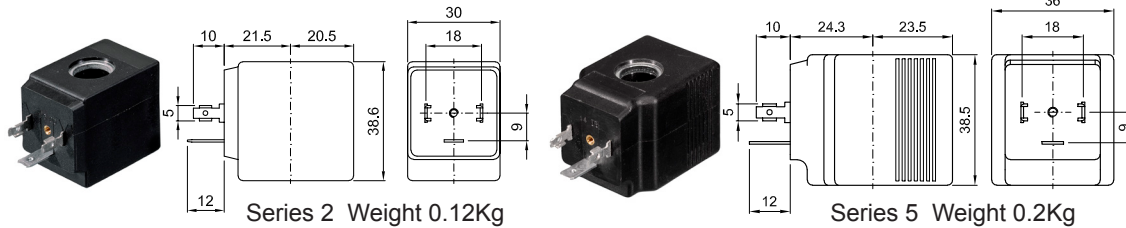


Series 2 Weight 0.12Kg


Series 5 Weight 0.2Kg

SPARE PARTS LIST

1. Coil
2. Armature tube
3. Armature tube OR
4. Body OR
5. Diaphragm assembly+plunger

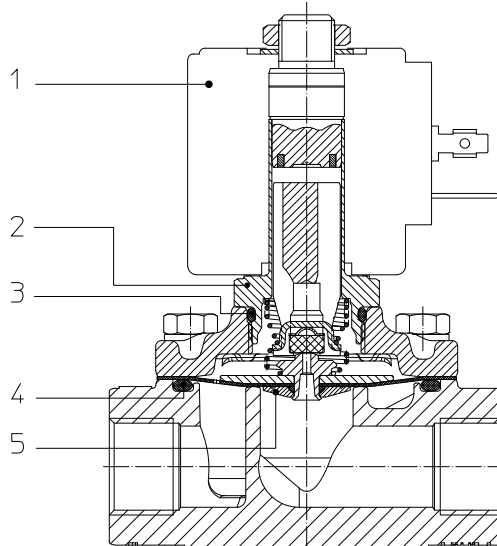

OVERALL DIMENSION

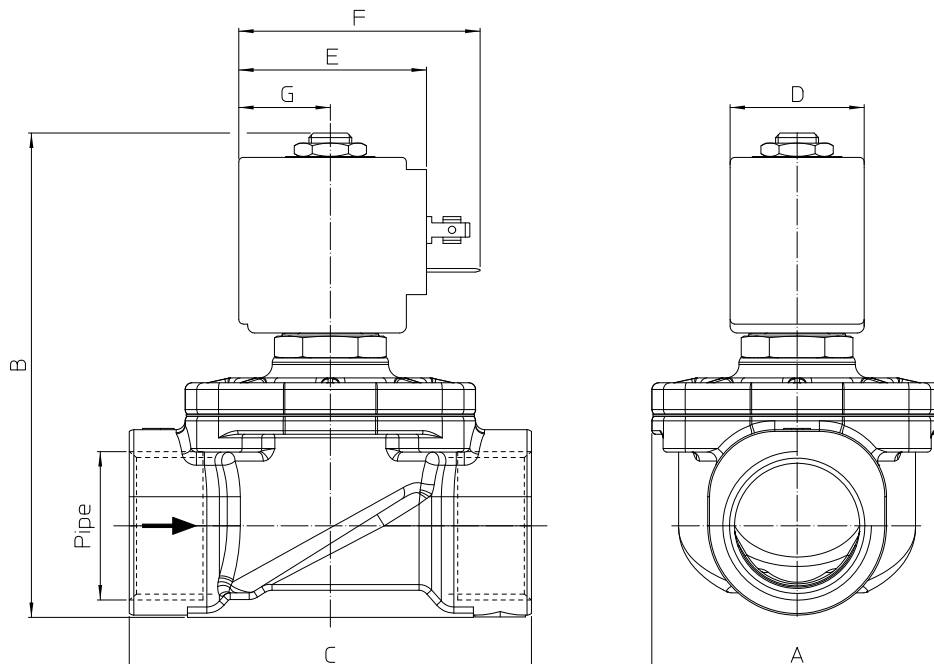

PIPE	A	B	C
G3/8"	52	92	68
G1/2"	52	92	68
G3/4"	58	100	75
G1"	65	109	90
G1"1/4	94	126	128
G1"1/2	94	126	128

COIL TYPE	D	E	F	G
Series 2 30mm	30	42	54	20.5
Series 5 36mm	36	48	60	23.5